





2.54mm(0.100") Board Spacer, Single Row, Right Angle Type H=1.50mm

SPECIFICATIONS


Current Rating : 3AMP
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : 1000V AC/minute
 Operation Temperature: -40° C to +105° C
 Contact Material : Brass
 Contact plating : Gold Flash Plated
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Standard: PBT+30%G.F

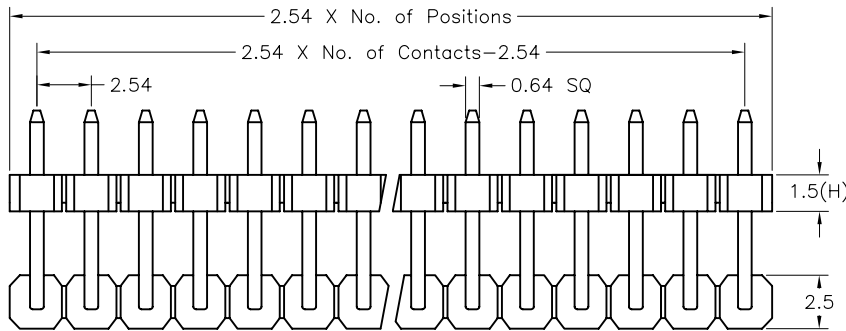

PAR1152 Series

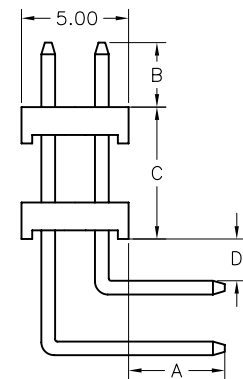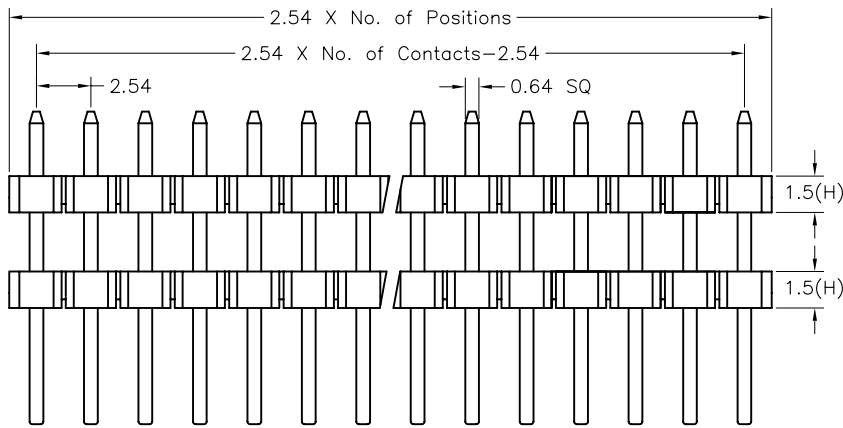

PAR2152 Series

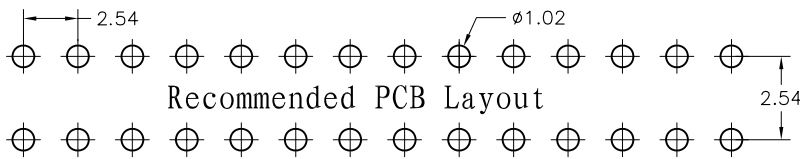

H	1.5	2.0	2.5
---	-----	-----	-----

Pin Length=A+B+C+D+2H-0.96
 (A+B+C+D+1.23)

Ordering Information

PAR1152
 /PAR2152

XX

XX

A

XX

B

1

A

X

Plastics Height
 15:1.5mm
 20:2.0mm
 25:2.5mm

No. of Pins Per Row
 02~40

Contact Plating
 01:Gold Flash
 02:Gold 2μ''
 03:Gold 3μ''
 04: Tin
 Duplex Plating
 06:Gold Flash/Tin(100μ'')

Serial Number

Material Type
 A:PBT
 B:NYLON 6T
 C:LCP
 D:NYLON 9T

Options
 A:BAG
 B:TRAY
 C:TUBE
 D:TAPE REEL